

# MECHANICAL PROPERTIES OF COMPOSITE SCAFFOLDS FROM POLY(3-HYDROXYBUTYRATE) AND SODIUM ALGINATE

NTON BONARTSEV<sup>1\*</sup>, VSEVOLOD ZHUIKOV<sup>2</sup>,  
IRINA ZHARKOVA<sup>1</sup>, ELYSABETH AKOULINA<sup>2</sup>, VERA VOINOVA<sup>1</sup>,  
GARINA BONARTSEVA<sup>2</sup>, KONSTANTIN SHAITAN<sup>1</sup>

<sup>1</sup> FACULTY OF BIOLOGY, M.V. LOMONOSOV  
MOSCOW STATE UNIVERSITY, LENINSKIE GORY, 1-12,  
119234, MOSCOW RUSSIA

<sup>2</sup> A.N. BACH INSTITUTE OF BIOCHEMISTRY,  
THE FEDERAL RESEARCH CENTRE "FUNDAMENTALS OF  
BIOTECHNOLOGY" OF THE RUSSIAN ACADEMY OF SCIENCES,  
LENINSKY AVE., 33, BLD. 2, 119071, MOSCOW, RUSSIA

\*E-MAIL: ANT\_BONAR@MAIL.RU

[ENGINEERING OF BIOMATERIALS 143 (2017) 89]

## Introduction

Recent years biodegradable polymers of natural origin, poly(3-hydroxyalkanoates) (PHAs) and alginates (ALGs), have found broad application in medicine and tissue engineering. These polymers are very different in their properties: PHAs are hydrophobic, mechanically strong polyesters, while alginates are hydrophilic, hydrogel-forming, mechanically destructible polysaccharides. However these polymers bring together the fact that PHAs and ALGs can be produced biotechnologically allowing to regulate their properties [1,2]. Particularly, development of composite constructions from these polymers makes it possible to adjust the selected properties, especially mechanics, of the resulting composite PHAs/ALGs constructions for bone and cartilage engineering, where PHAs and ALGs are widely used. Thus, the objective of the work was to create the composite scaffolds from poly(3-hydroxybutyrate) (PHB) and sodium alginate (ALG).

## Materials and Methods

Two types of PHB/ALG constructions were manufactured: porous constructs from PHB filled with ALG hydrogel (ALG-in-PHB) and ALG hydrogel embedded with PHB microspheres (PHB-in-ALG). The PHB porous constructs used in this work were manufactured by two-stage leaching technique using two blowing agents: ammonium carbonate and sucrose and then filled with ALG with hydrogel formation. PHB microspheres were produced by two-stage emulsification technique and then mixed with ALG to produce hydrogel. Various PHB/ALG composite construction with different parameters: pore size, microspheres diameter, microspheres content, hydrogel density were produced. The morphology of composite scaffolds was investigated by scanning electron microscopy (SEM) and by wide-field light microscopy (WLM). The mechanical properties of obtained constructions were measured by rheometry.

## Results and Discussion

The Young's modulus of obtained PHB/ALG composite scaffolds varied from 9 to 178 kPa. The complicated dependence between mechanical properties and morphological features of PHB/ALG composite scaffolds was revealed and analysed. Morphological features (e.g. pore size, microspheres diameter, porosity) of produced scaffolds effect greatly on its mechanics: e.g. increase in diameter of microspheres from 50 to 500 mkm caused 6-fold increase in Young's modulus of PHB-in-ALG scaffolds.

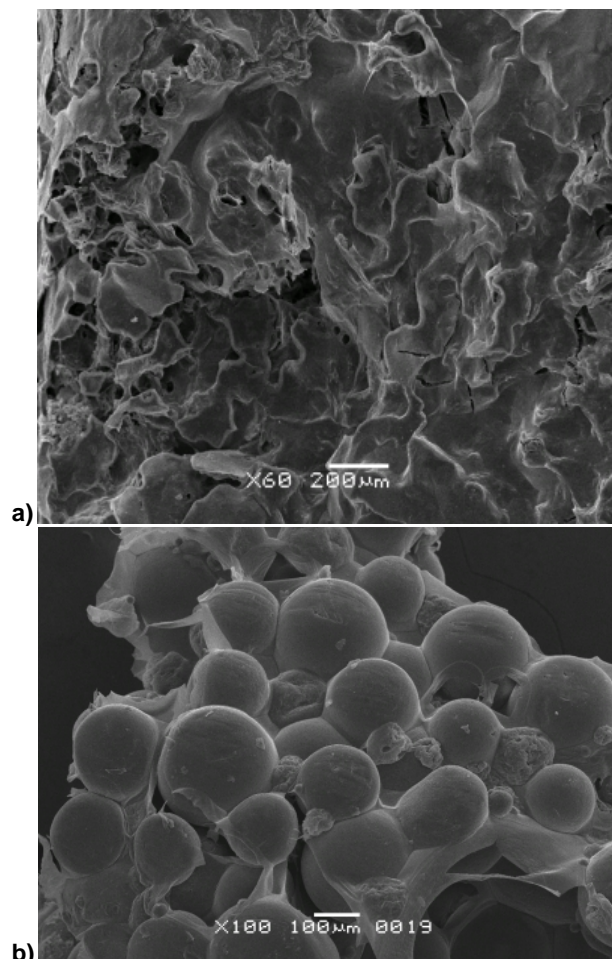


FIG. 1. SEM microphotographs of ALG-in-PHB (a) and PHB-in-ALG scaffolds (b).

## Conclusions

In general, PHB microspheres reinforced PHB-in-ALG scaffolds more efficiently than PHB porous structures ALG-in-PHB scaffolds. Further the technique of hybrid PHB/ALG scaffolds production will be used to develop biocomposite scaffolds and fillers for bone tissue engineering.

## Acknowledgments

This work was supported by RFBR ofi\_m grant, project No 15-29-04856.

## References

- [1] A. Bonartsev, I. Zharkova *et al.*, Preparative Biochemistry and Biotechnology, 47 (2017), 173-184.
- [2] G. Bonartseva, E. Akulina *et al.*, Applied Biochemistry and Microbiology, 53 (2017), 51–58.